

1

2

3

4

5

6




7

8

9

No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
①			

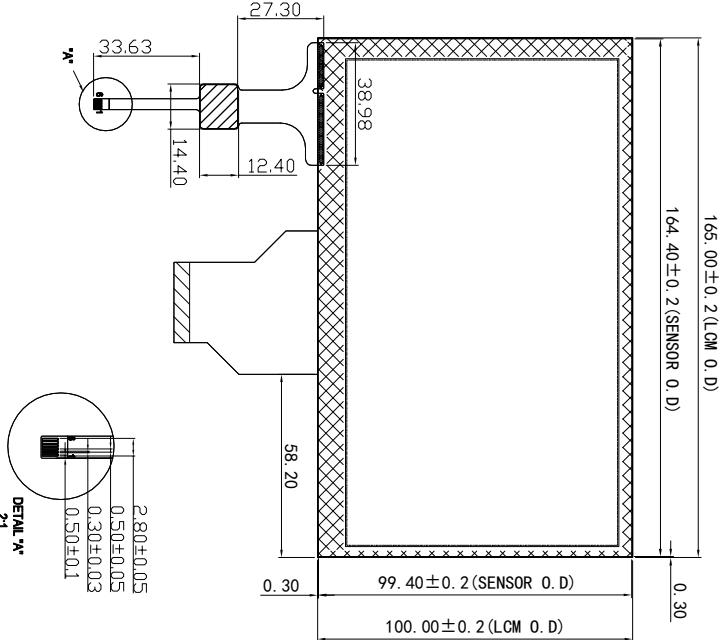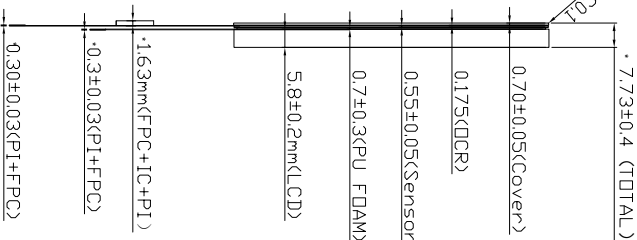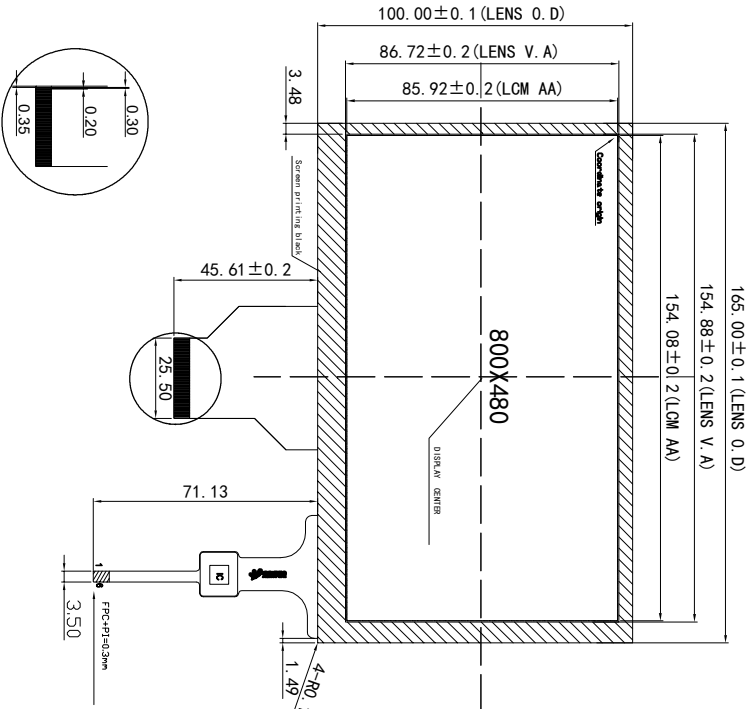

Screen printing area: Print Black

Frame adhesive foam area = 0.7mm

Front view

Side view

Back view

TP	PIN:
1	INT 3.3V
2	VDD 3.3V
3	SCL 3.3V
4	SDA 3.3V
5	RST 3.3V
6	GND

Technical parameters

1. Interfaces:	12C	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC solutions:	CYTA568	9. Surface hardness:	≥6H
4. Impact resistance:	30.000A, Steel Ball / 125g/1000h/50mm/time	10. Operate :	-20℃~+70℃, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30℃~+80℃, ≤85%RH
6. Power supply:	3.3V	12. Unmarked dimension tolerance:	as ±0.2

TFT PIN<HX070NL22-50ND-30C>

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
LED-A	LED-A	LED-K	LED-K	GND	VCM	DV/D	MODE	DE	VS	HS	B7	B6	B5	B4	B3	B2
B1	B0	G7	G6	G5	G4	G3	G2	G1	G0	R7	R6	R5	R4	R3	R2	R1
35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	
R0	GND	DCLK	GND	L/R	U/D	VGH	VGL	AVDD	RESET	NC	VCM	DITB	GND	NC	NC	



杭州宏梟科技有限公司
Grahwolet Technology CO., Ltd

Model	HX0701706	view direction	Unit	MM
Version	V1.0	Designer	Jeson	Date
Customer	Approved	HBZ	Date	2017-4-6
			Proportion	1:1