

1

2

3

4

5

6



7

8

9

No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
Δ			
Δ			

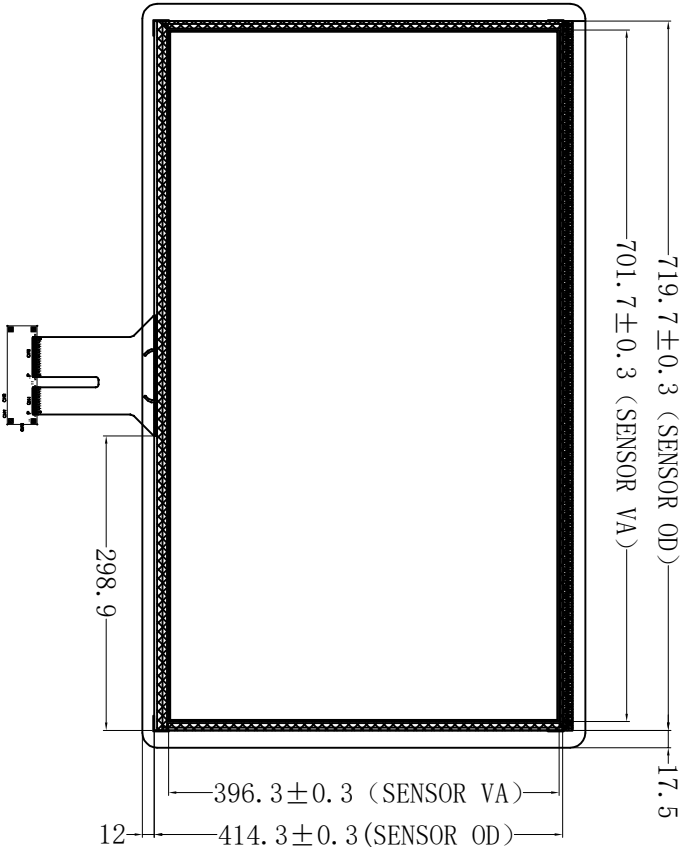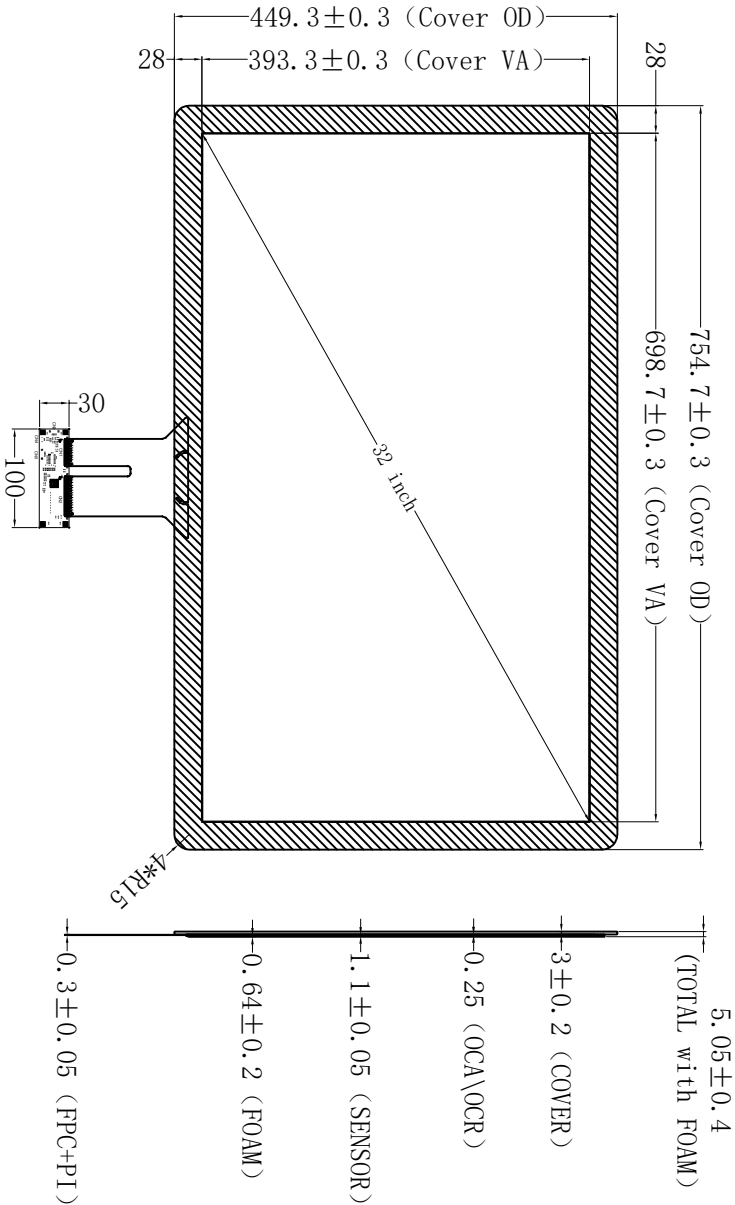

Screen printing area: Print Black

Frame adhesive foam(3M4930)=0.64mm

Front view

Side view

Back view

Technical parameters

1. Interfaces:	USB	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	$\geq 85\%$
3. IC Solutions:	ILI2312	9. Surface hardness:	$\geq 6H$
4. Impact Resistance:	30.0g/D1A, Steel Ball 1/32g/Hei=35cm/1time	10. Operate :	-20℃~+70℃, $\leq 85\%$ RH
5. Touch points:	10 points	11. Storage :	-30℃~+80℃, $\leq 85\%$ RH
6. Power supply:	5V	12. Unmarked dimension tolerance	as ± 0.5

USB Connector (J1)

1	VCC(5V)
2	DN
3	DP
4	GND



杭州宏泉科技有限公司
GrahHowlet Technology CO., Ltd

Model	HX3201803		View Direction	Unit	MM
Version	V1.0	Designer	LUO	Date	2018-4-11
Customer		Approved	HBZ	Date	2018-4-11
				Proportion	1:1